







/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)

	°C					
						°C
		~				°C

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

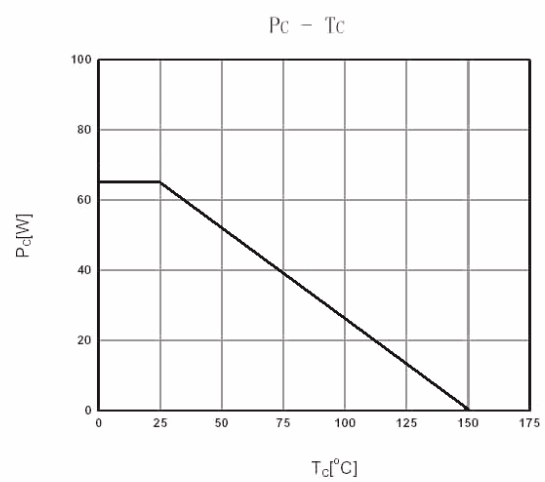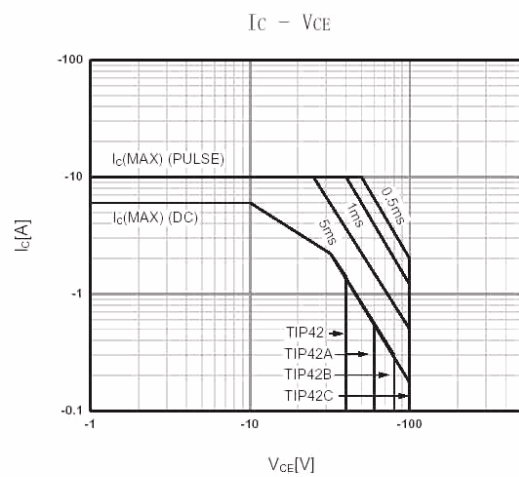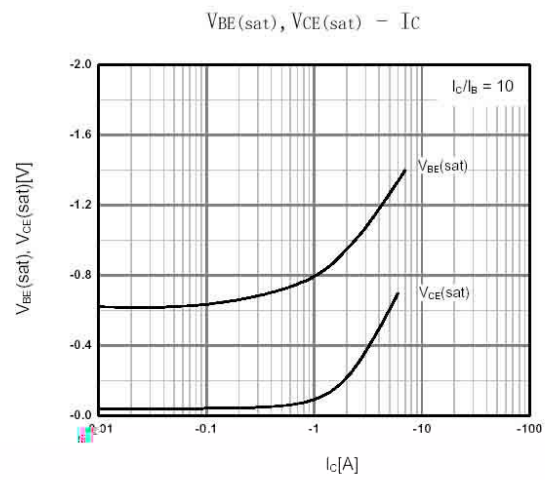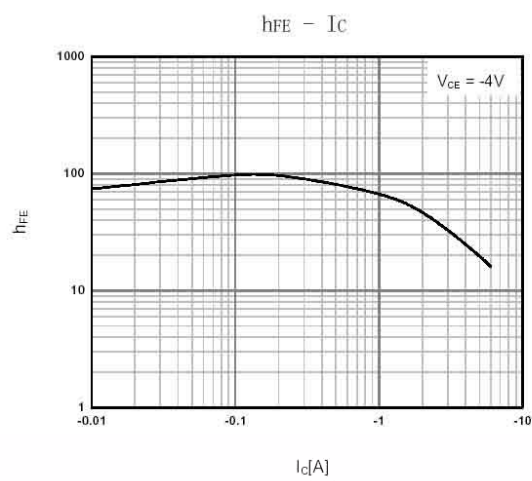

/ Package Dimensions


T0-220

单位: mm

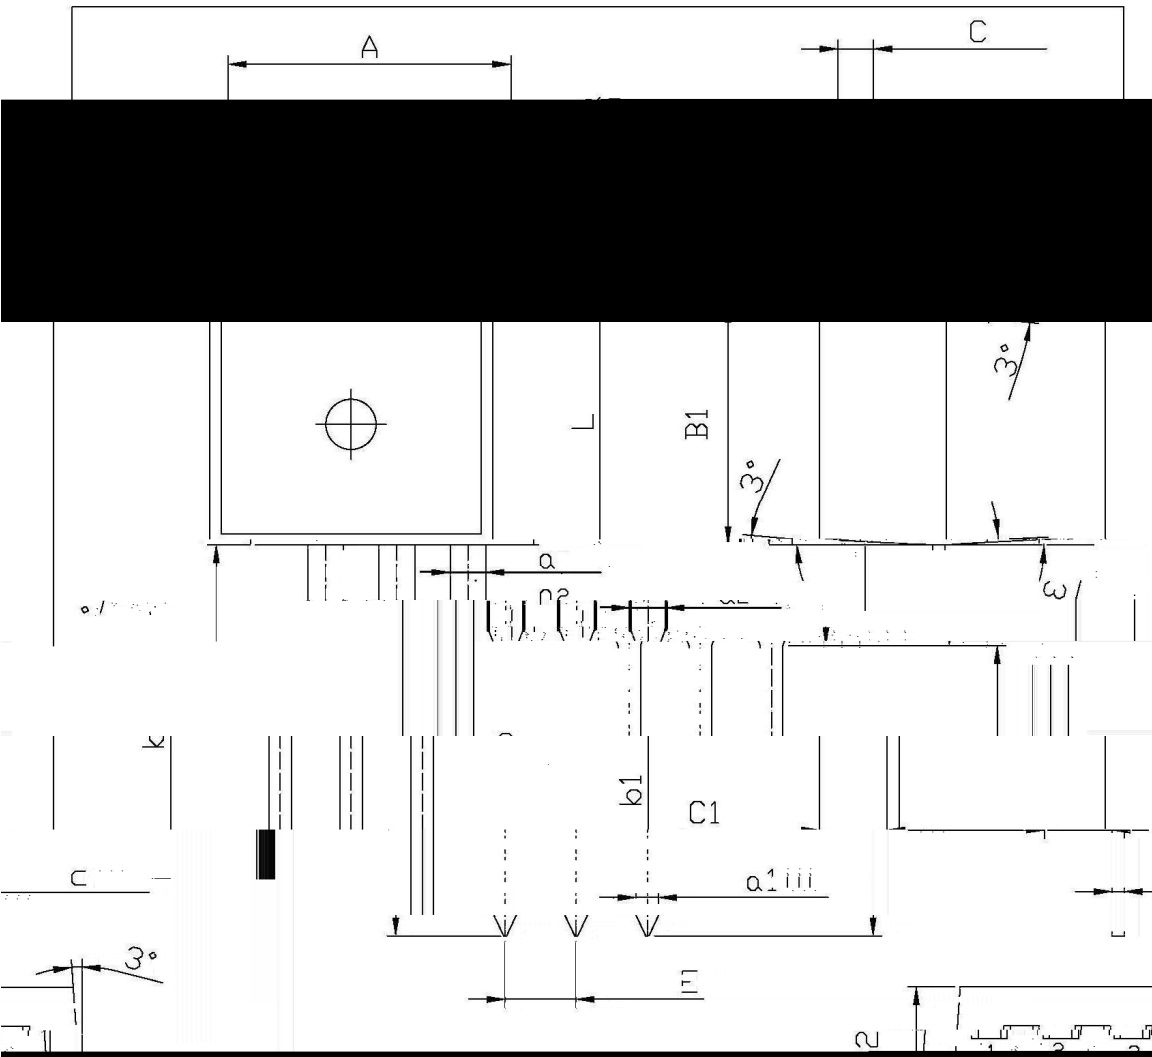


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
B	6.3	6.7	B1	9.0	9.4
C1	2.2	2.6	a	0.4	0.6
a1	1.22	1.32	b1	0.7	0.9
k	2.24	2.74	l	1.4	1.7
l	0.2	0.25			

/ Marking Instructions

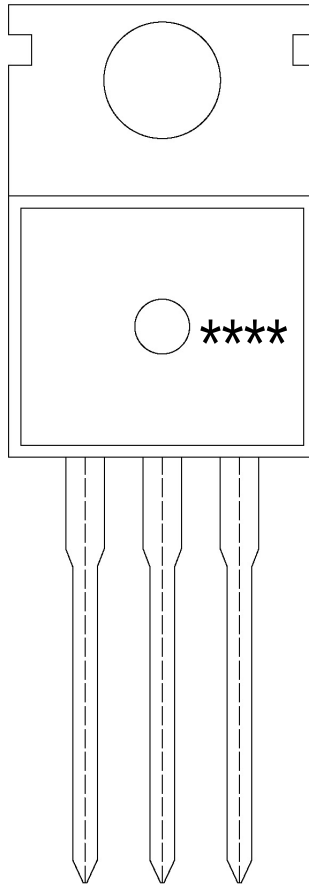

() / Temperature Profile for Dip Soldering(Pb-Free)

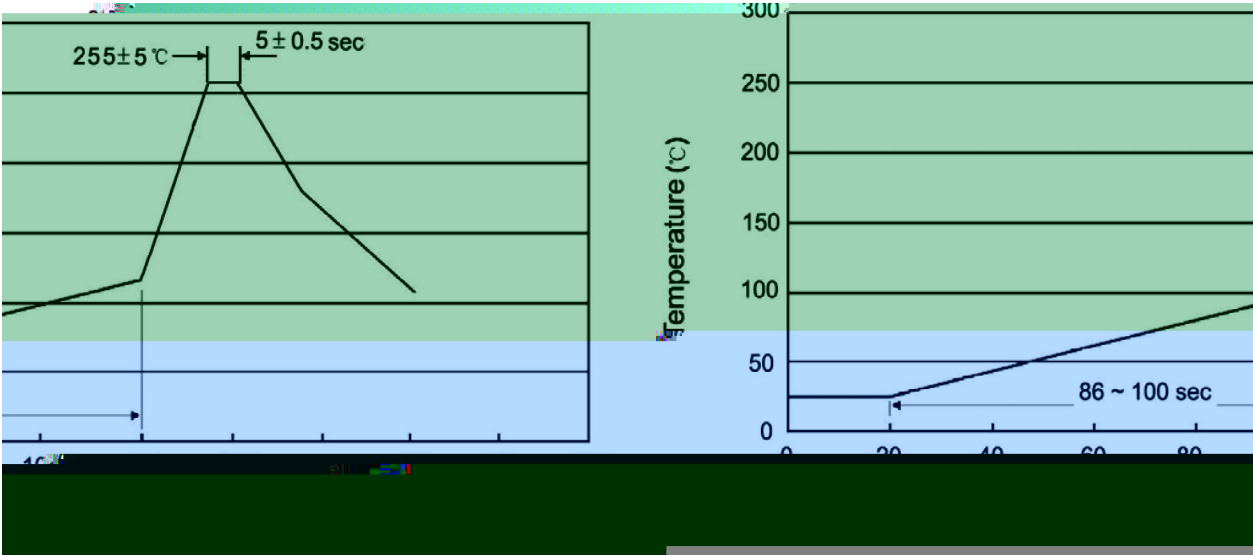

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量				包装尺寸	:
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inits/Inner Box		