


50V~1000V

1.0A

SOD-123FL

2011/65/EU

RoHS



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

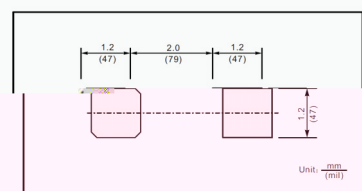




Fig.1 Forward Current Derating Curve



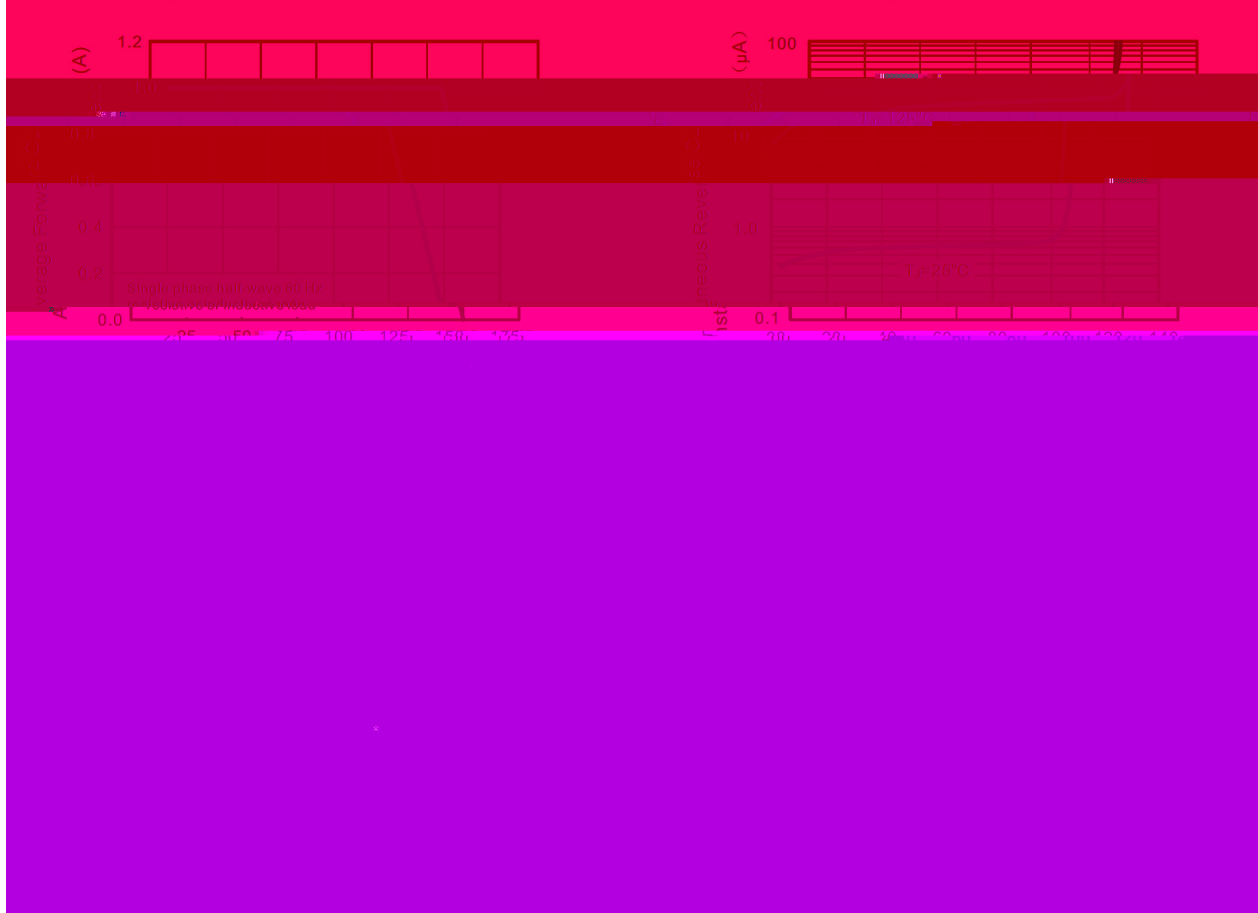


Fig.2 Typical Reverse Characteristics

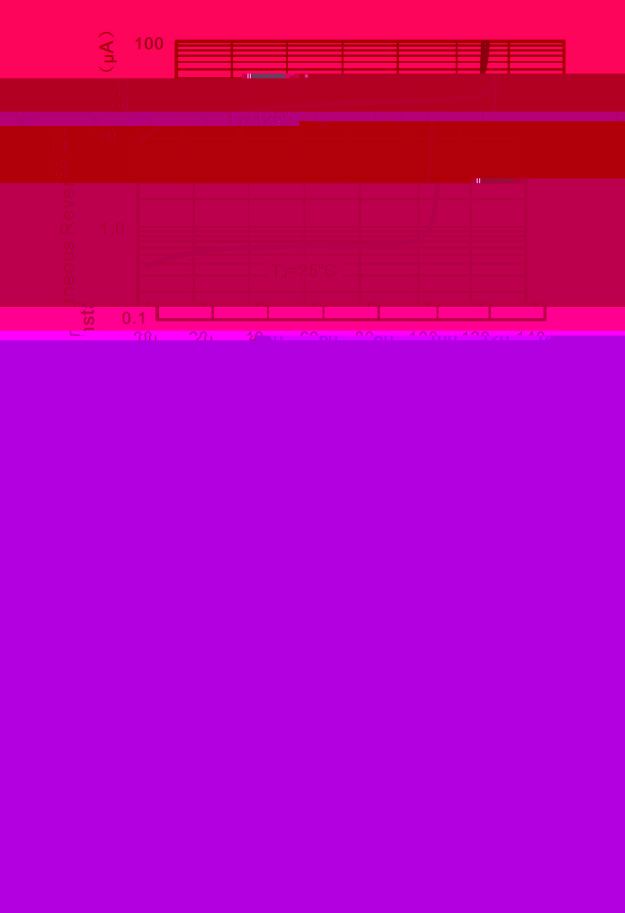


SOD-123FL

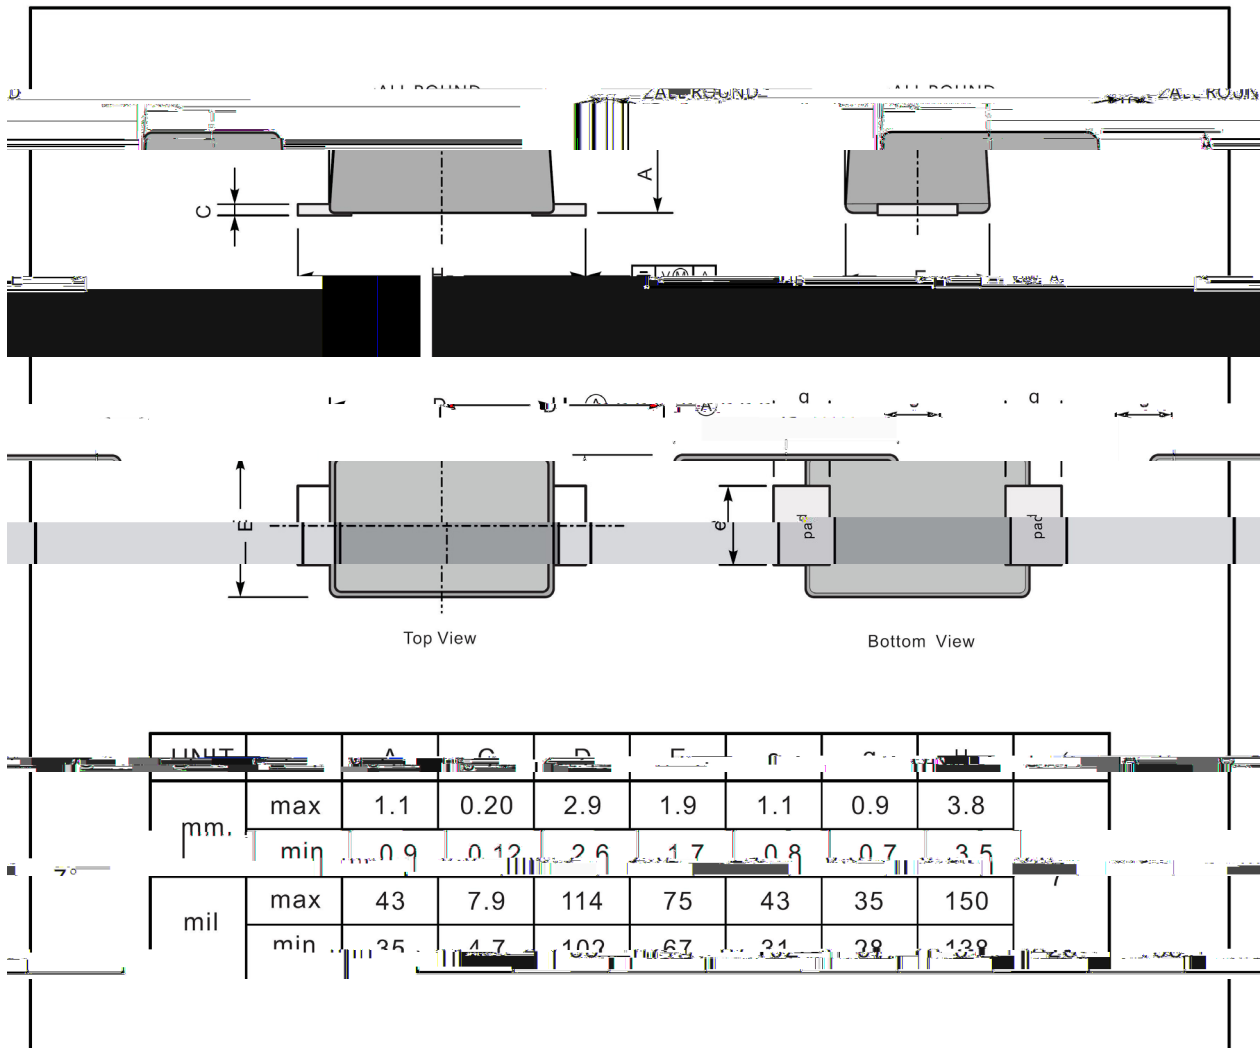

Marking

Type number	Marking code
US1AW	USL
US1BW	
US1DW	
US1GW	USM
US1JW	USH
US1KW	
US1MW	

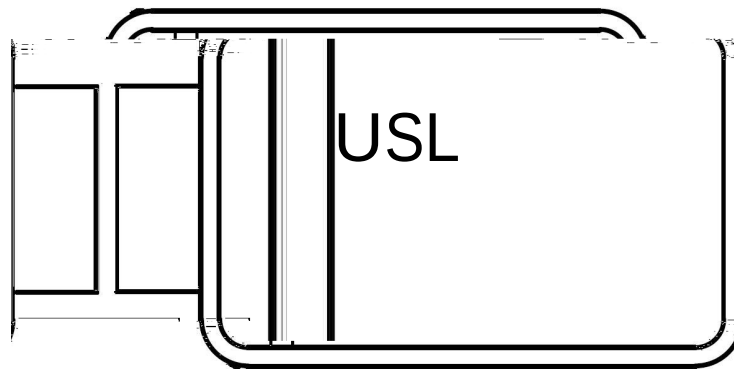


USL

1

3

USL

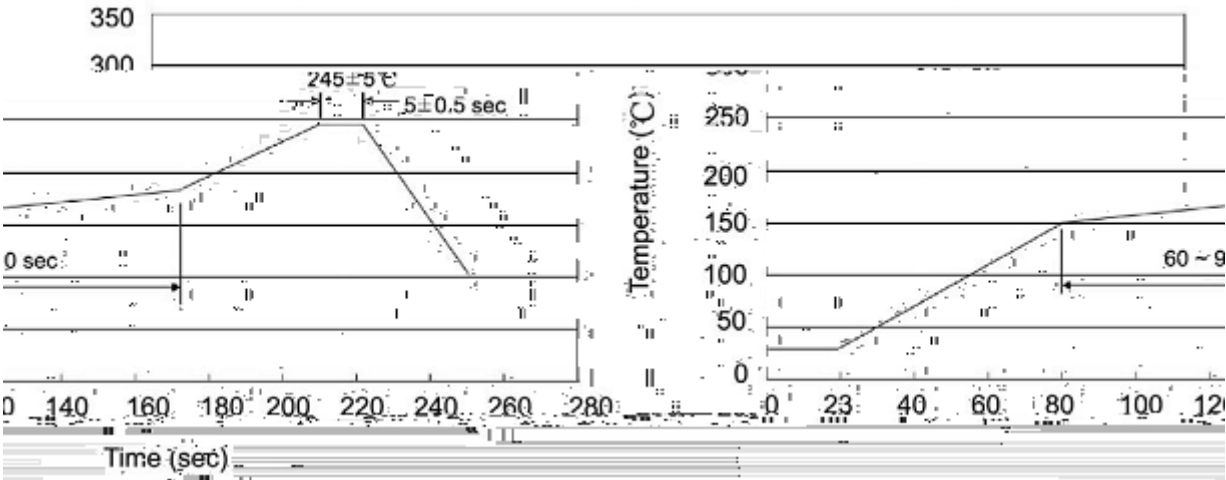

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱