


Silicon PNP transistor in a TO-92 Plastic Package.

Complementary pair with 2SC1317.

AF output amplifier and driver.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	85~170	120~240	170~340

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-30	V
Collector to Emitter Voltage	V_{CEO}	-25	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Collector Current – Continuous(Pulse)	I_{CP}	-1.0	A
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	-55 150	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -10\mu A$ $I_E = 0$	-30			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -10mA$ $I_B = 0$	-25			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -10\mu A$ $I_C = 0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -20V$ $I_E = 0$			-0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -10V$ $I_C = -150mA$	85		340	
	$h_{FE(2)}$	$V_{CE} = -10V$ $I_C = -500mA$	40			

Collector to Emitter Saturation

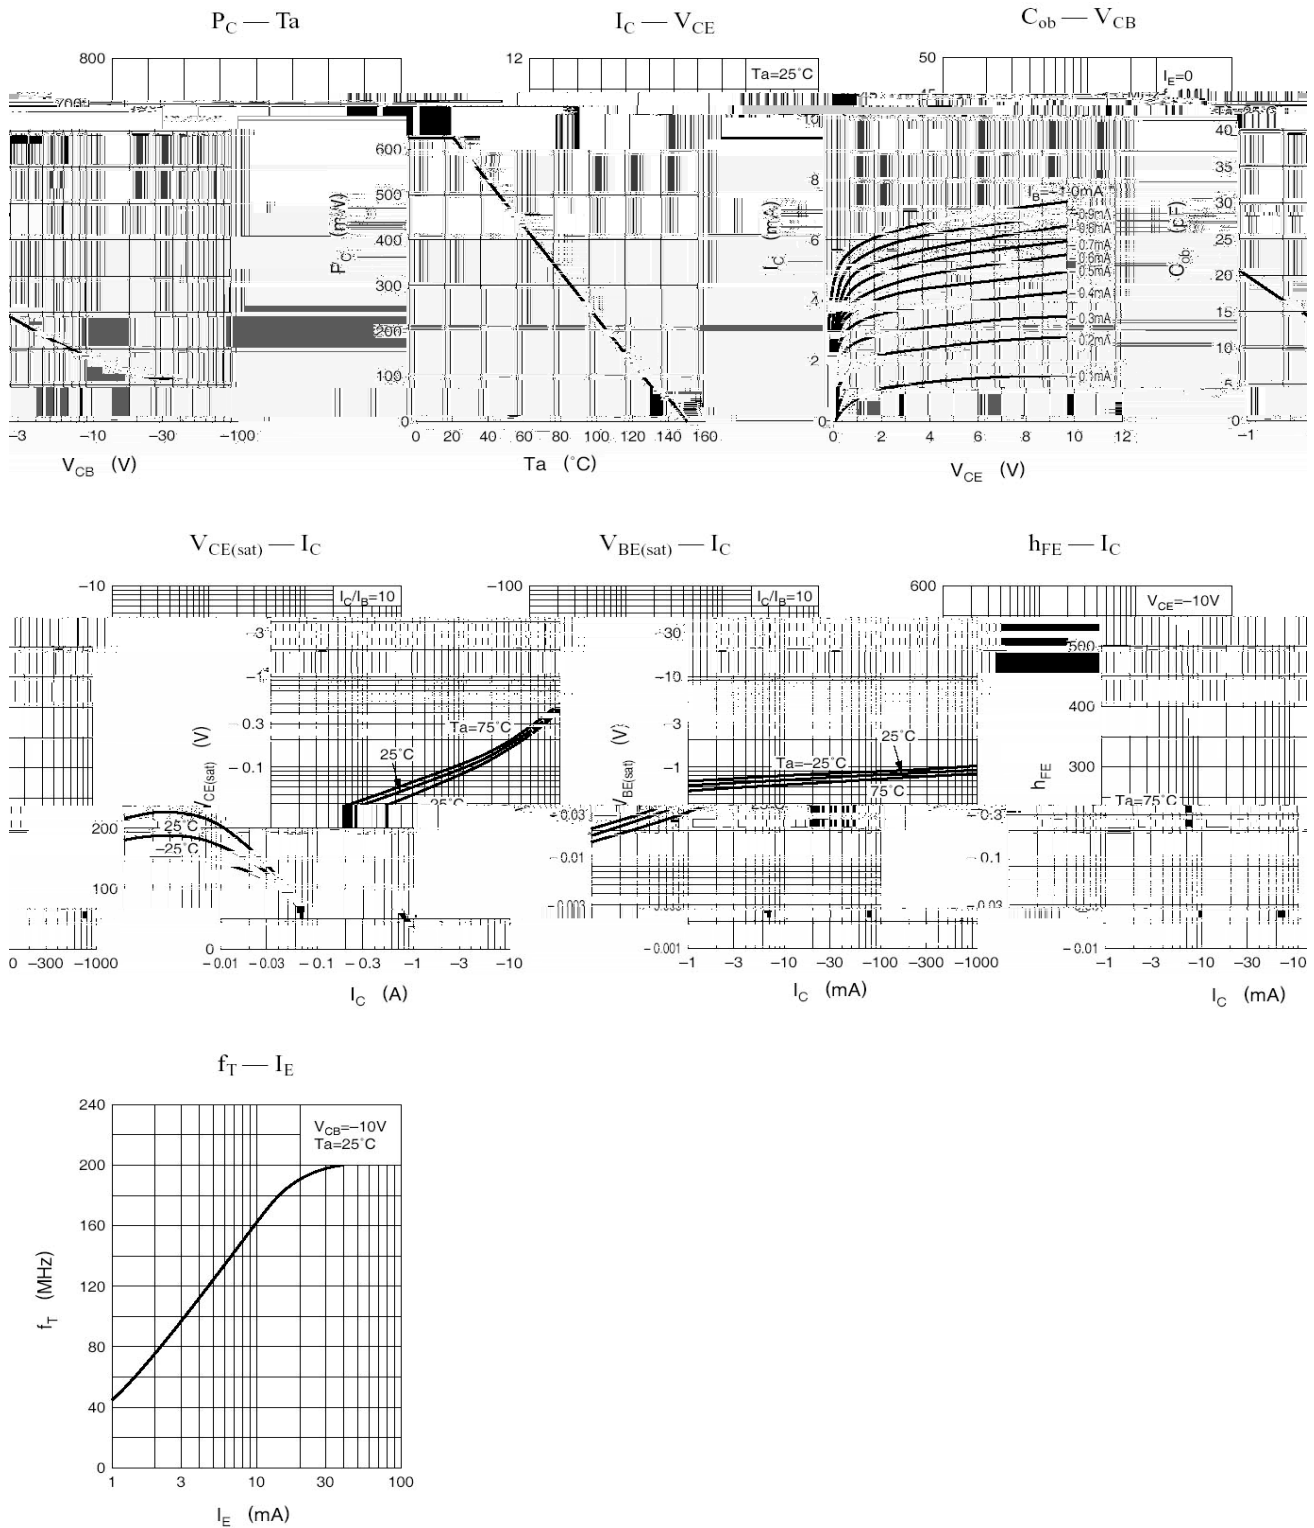



h_{FE}


Note:

BR: Company Code.

A719: Product Type.

Q: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

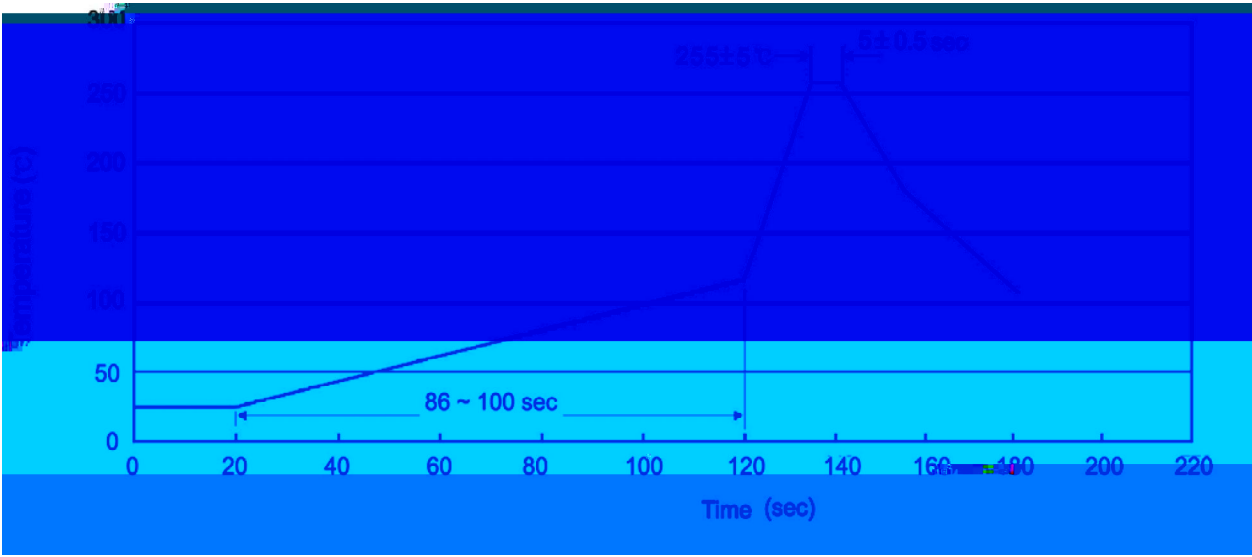

Note:

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

270 5

10 1 sec.

Temp:270±5℃

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92	3,000	1	120	10	30,000	328×230×42	小箱 480×346×235, 大箱 547×407×268