
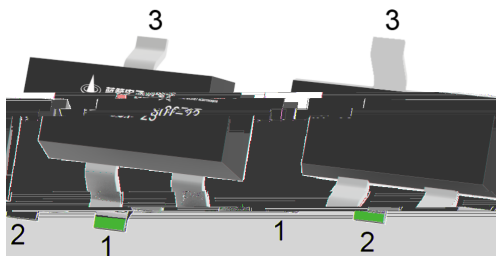


SOT-23 PNP Silicon PNP Digital transistor in a SOT-23 Plastic Package.

AEC-Q101

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Switching applications, interface circuit and driver circuit applications, Meet the stringent requirements of automotive applications.



PIN 1 Base


PIN 2 Emitter

PIN 3 Collector

Marking	Q14
---------	-----

Parameter	Symbol	Rating	Unit
Output Voltage	V_{CC}	-50	V
Input Voltage	V_{IN}	-40	V
		10	V
Output Current	I_C	-100	mA
	I_O	-50	mA
Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage(OFF)	$V_{I(off)}$	$V_{CC}=-5.0V$ $I_O=-100\mu A$			-0.5	V
Input Voltage(ON)	$V_{I(on)}$	$V_O=-0.3V$ $I_O=-10mA$	-3			V
Output Voltage	$V_{O(on)}$	$I_O=-10mA$ $I_I=-0.5mA$			-0.3	V
Input Current	I_I	$V_I=-5.0V$			-0.88	mA
Output Cut-off Current	$I_{O(off)}$	$V_{CC}=-50V$ $V_I=0V$			-0.5	A
DC Current Gain	G_I	$V_O=-5.0V$ $I_O=-5.0mA$	30			
Transition Frequency	f_T	$V_{CE}=-10V$ $I_C=-5.0mA$ $f=100MHz$		250		MHz
Resistance1	R_1		7	10	13	K
Resistance Ratio	R_2/R_1		0.8	1	1.2	

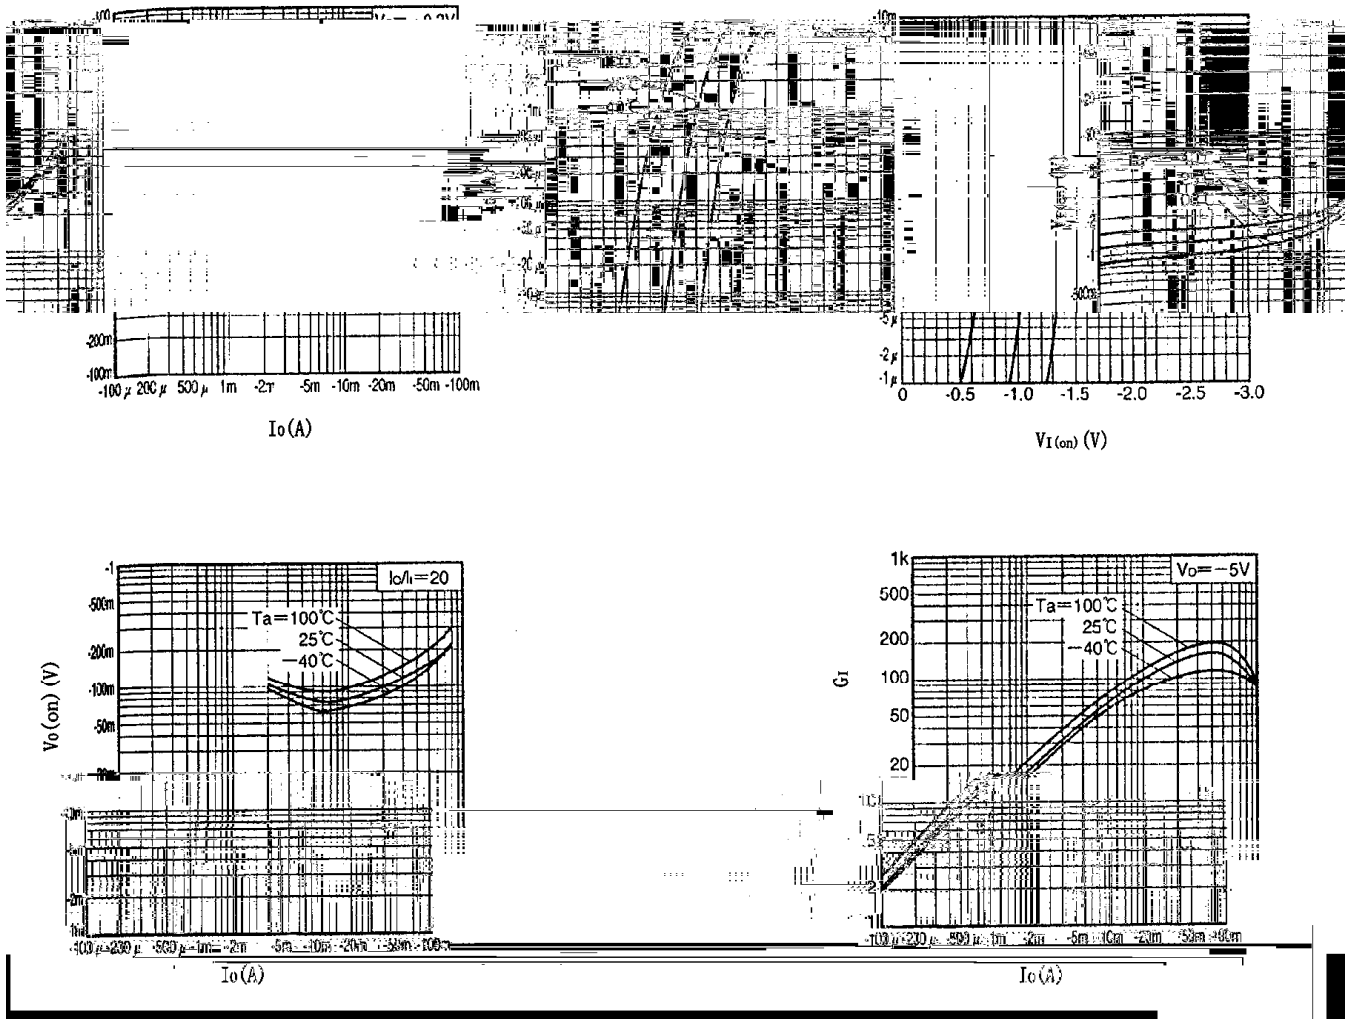



Q


14

Note:

Q: Automobile halogen-free product Code

14 Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

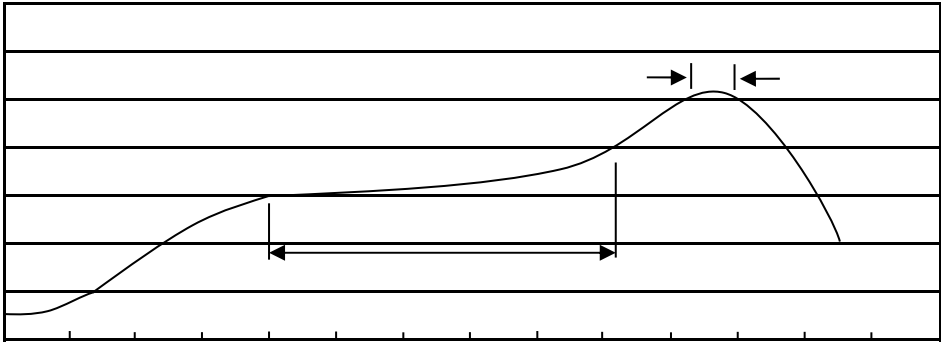

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10

/sec.

3.Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205