


TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

High gain bandwidth ,small output capacitance, low noise figure.

FM/RF amplifier and local oscillator of FM tuner.




PIN1 Collector PIN 2 Base PIN 3 Emitter

h_{FE} Classifications Symbol	R	O	Y
h_{FE} Range	40~80	70~140	120~240


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V
Collector to Emitter Voltage	V_{CEO}	20	V
Emitter to Base Voltage	V_{EBO}	4.0	V
Collector Current - Continuous	I_C	20	mA
Base Current – Continuous	I_B	20	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter Symbol

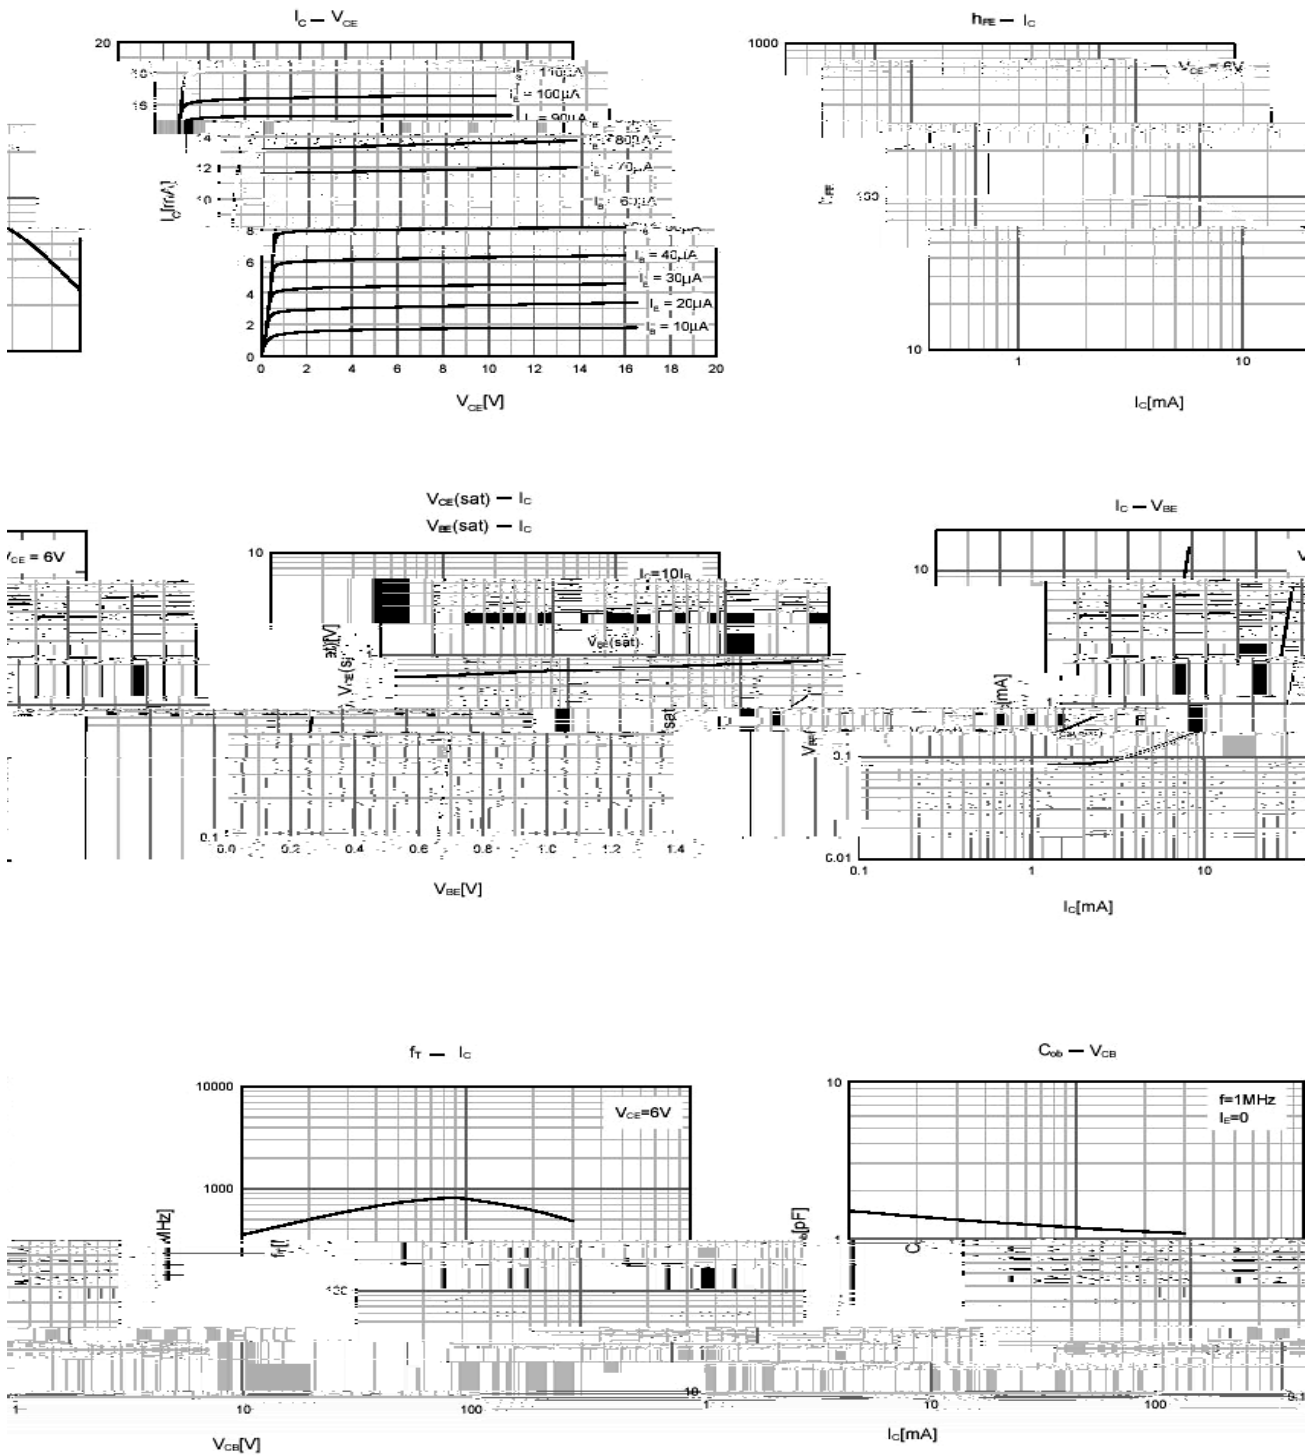

T0-92

Unit: mm

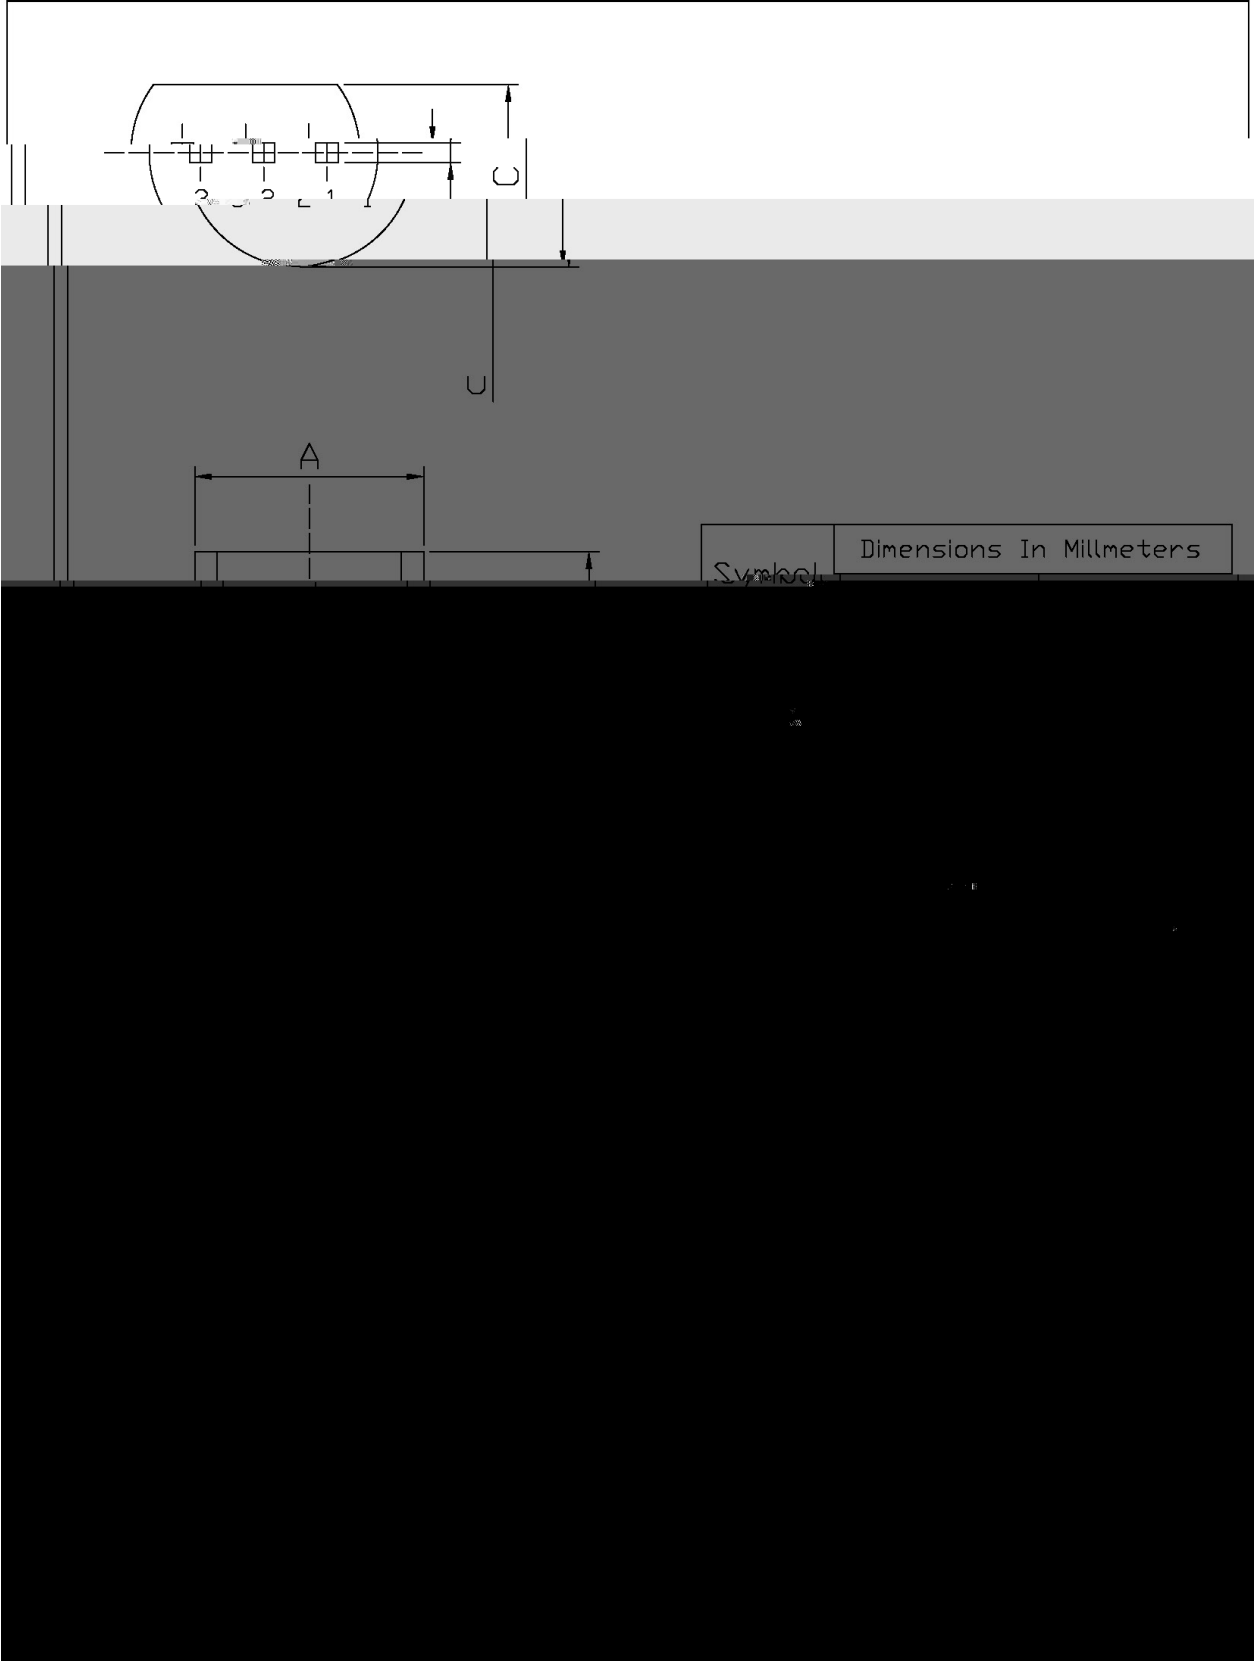



BR:

C1674

R: h_{FE}


Note:

BR: Company Code.

C1674: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

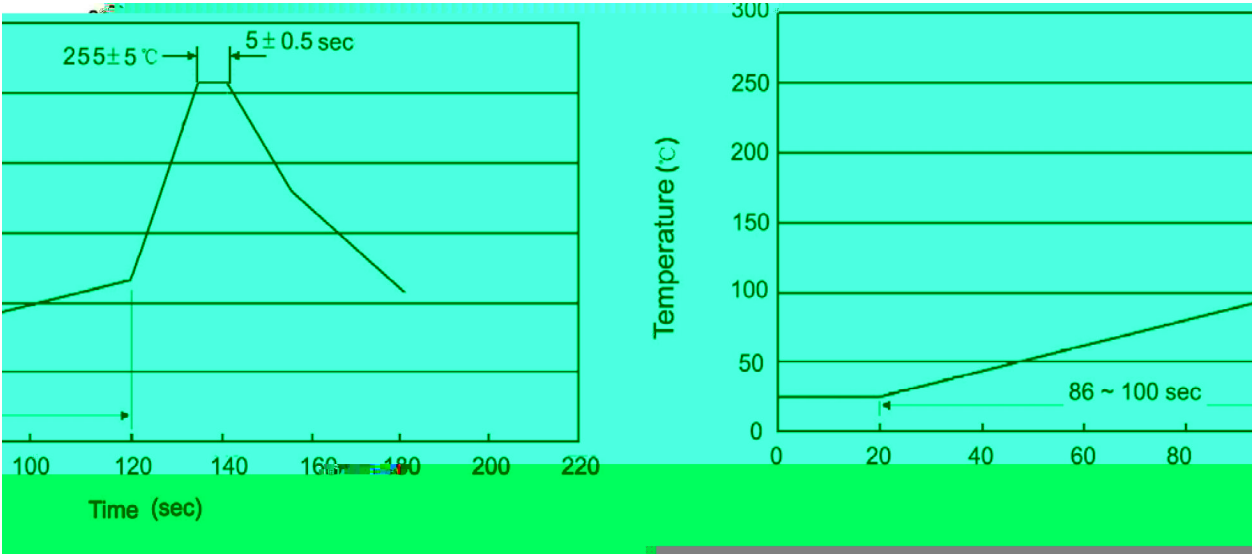

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92	3,000	1	120	10	30,000	328×230×42	小箱 480×346×235, 大箱 547×407×268